Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

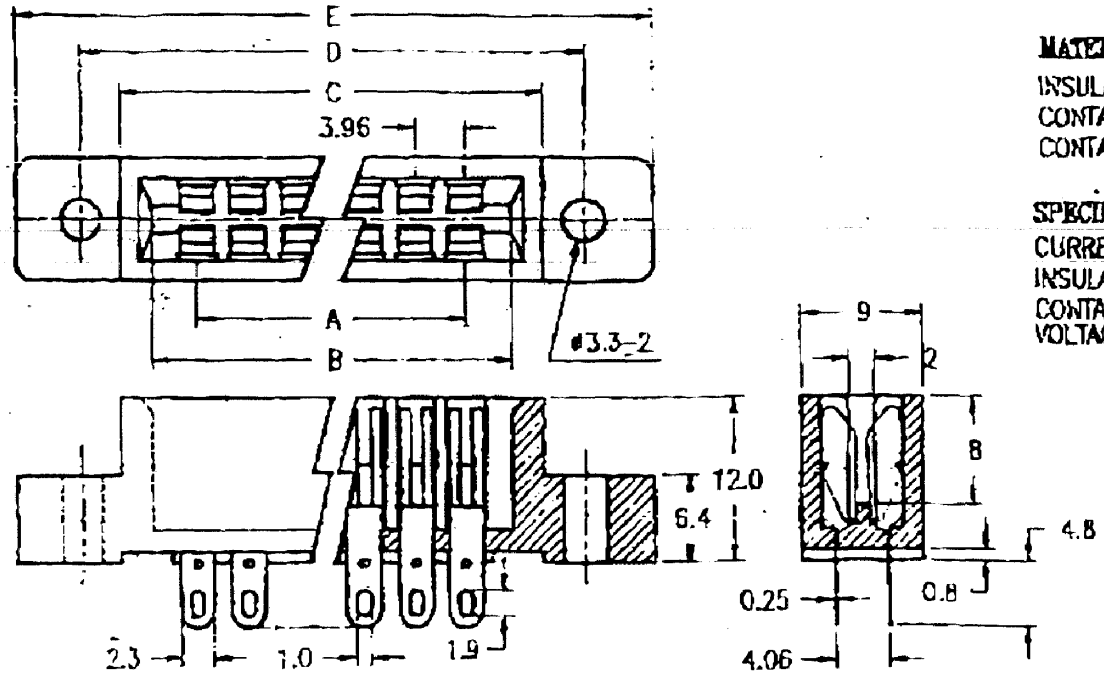

MATERIAL

INSULATOR:PBT +30% GLASS FIBER (UL94V-0)
CONTACT:PHOSPHOR BRONZE OR BRONZE
CONTACT PLATED:GOLD OVER NICKEL OR TIN

SPECIFICATION

CURRENT RATE : 3A
INSULATOR RESISTANCE:1000MΩ MIN. AT 500V DC
CONTACT RESISTANCE:20mΩ MAX.
VOLTAGE:500V AC FOR ONE MINUTE

PINS	A	B	C	D	E
12	19.80	28.16	31.16	38.86	48.24
20	35.64	44.00	47.00	54.70	64.00
24	43.56	52.00	55.00	62.70	72.00
30	55.44	63.80	66.80	74.50	83.80
36	67.32	75.70	78.70	86.40	95.70
40	75.24	83.60	86.60	94.32	103.64
50	95.04	103.4	106.4	114.12	123.44
56	106.92	115.3	118.3	126.0	135.3
60	114.84	123.22	126.22	133.92	143.22
62	118.80	127.16	130.16	137.88	147.2
72	138.6	147.0	150.0	157.8	165.6

Jameco Part Number 39116

記號	變更內容	簽認	年月日	變更者
1				
2				
3				

尺寸	公差
	±0.1
	±0.05
	±0.01
000	±0.005
ANG	±0°10

比例 1 | 2

單位 MM

製圖	設計	校對	核准

Cardedge Connector (Slot)

SLA - 001 - 001